




Fused Terminal Blocks

1003 SI/ 2 DS GW

Order Info

reference number (ref. no.)	11624
PU	200
EAN	4028012144006

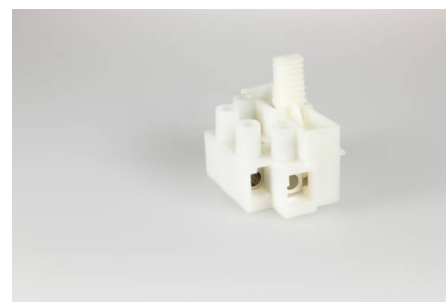

Type

Type	screw terminal block with fuse holder 6,3x25/6,3x32
connection type	screw
number of poles	2 pole
colour	natural
wire protection	yes

Electrical Data

rated voltage	500 V
rated current	16 A

Connection Data

rated connecting capacity	4.0 mm ²
cross-sectional area (UL)	22-10 AWG
clamping range	0.5-10.0 mm ²
type of conductor	fine stranded, stranded, solid
type of conductor internal	fine stranded, stranded, solid
type of conductor external	fine stranded, stranded, solid
stripping length	7.5-8.0 mm
clamping units per pole	1
contact screw assembly	0.8 x 4.0 / \curvearrowright 0.8 Nm
socket diameter	3.70 mm

Ambient Conditions

T _{max} ambient air (at rated current)	85 °C
T _{min} ambient air (operation)	-40 °C
T _{max} component (operation)	105 °C

Materials

insulator material	PA GW
contact material	brass
flammability rating acc. to UL 94	V-2

Approvals

acc. to EN 60127

acc. to UL

acc. to CSA

Accessories

ZEL 110

196420
