




Screw Terminal Blocks

230/ 6 HT

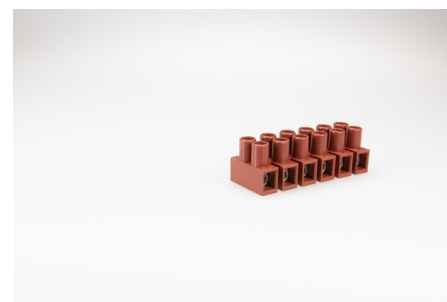

Order Info

reference number (ref. no.) 121246

PU 500

Type

Type terminal block

connection type screw

number of poles 6 pole

colour brown

Electrical Data

rated voltage 450 V

rated current 24 A

Connection Data

rated connecting capacity 2.5 mm²

cross-sectional area (UL) 22-12 AWG

clamping range 0.5-7.0 mm²

type of conductor fine stranded, stranded, solid

stripping length 5.0-5.5 mm

fixing Screw

clamping units per pole 1

contact screw assembly 0.8 x 4.0 / \curvearrowright 0.5 Nm

mounting hole diameter 2.8 mm

socket diameter 3.10 mm

pin spacing 8.0 mm

Ambient Conditions

T_{max} ambient air (at rated current) 130 °C

T_{min} ambient air (operation) -40 °C

Materials

insulator material PA HT

contact material brass

flammability rating acc. to UL 94 V-0

Approvals

acc. to EN 60998

acc. to UL

acc. to CSA

Accessories

ZEL 110

196420
