




## Screw-Screwless Connectors

### 900 Q/ 2

terminal block, 2 pole, fixing: screw, clamping units per pole: 4, voltage rating: 450 V, current rating: 17.5 A, cross-section rating external: 2.5 mm<sup>2</sup>, cross-section rating internal: 1.5 mm<sup>2</sup>

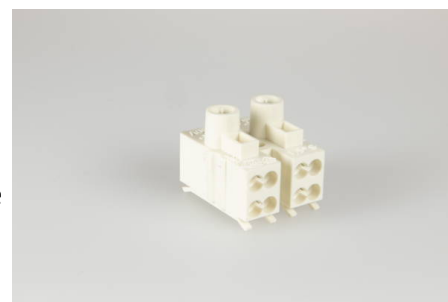

### Order Info

reference number (ref. no.)	114002
PU	1,500
EAN	4028012104314

### Type

type	terminal block
number of poles	2 pole
clamping units per pole	4
colour	white
cross-section rating	1.5 / 2.5 mm <sup>2</sup>
connection type	screw-screwless

### Technical Data

voltage rating	450 V
current rating	17.5 A
insulating material	PA 6.6
contact material	brass
flammability rating	V-2
max. Ambient Temperature Operation	85 °C
Assembly Contact Screw	0.8x4.0 / ⌀ 0.5 Nm
internal core cross-section max.	1.5 mm <sup>2</sup>
internal stripping length	7.0-7.5 mm
external stripping length	8.0-8.5 mm
fixing	screw
internal core cross-section min.	0.5 mm <sup>2</sup>
Type of Conductor Solid External	yes
Type of Conductor Flexible External	yes
Type of Conductor Solid Internal	yes
Type of Conductor Stranded Internal	yes
cross-section rating external	2.5 mm <sup>2</sup>
cross-section rating internal	1.5 mm <sup>2</sup>

## Approvals

---

<b>acc. to EN 60998</b>	<a href="#">Download PDF</a>
<b>acc. to UL</b>	<a href="#">Download PDF</a>
<b>acc. to CSA</b>	<a href="#">Download PDF</a>

---

## Accessories

---

<b>ZEL 110</b>	196420
----------------	--------

---