




Fused Terminal Blocks

900 SI RZ/ 1

Order Info

reference number (ref. no.)	175201
PU	100
EAN	4028012108084

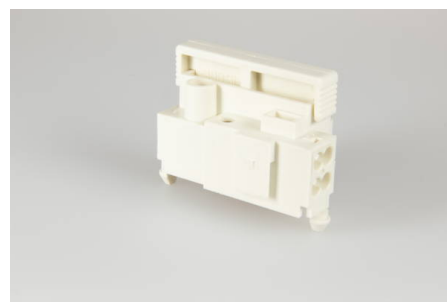

Type

Type	screw-screwless terminal block with fuse holder 6,3x25/6,3x32
connection type	screw plug-in
number of poles	1 pole
colour	white

Electrical Data

rated voltage	400 V
rated current	6.3 A

Connection Data

clamping range internal	0.5 - 4.0 mm ²
clamping range external	0.5 - 1.5 mm ²
type of conductor internal	solid
type of conductor external	fine stranded, stranded, solid
stripping length internal	7.0 - 7.5 mm
stripping length external	8.0 - 8.5 mm
fixing	short catch pin
clamping units per pole	4
contact screw assembly	0.8 x 4.0 / ⚙ 0.5 Nm
wall thickness	0.5 - 1.4 mm

Ambient Conditions

T _{max} ambient air (at rated current)	70 °C
---	-------

Materials

insulator material	PA
contact material	brass
flammability rating acc. to UL 94	V-2

Approvals

Accessories

ZEL 110

196420
